


## LED PANEL 1200 X 600mm

72W

Fits in suspended ceiling grid. Direct replacement for  
luorescent luminaires. Installs in minutes!

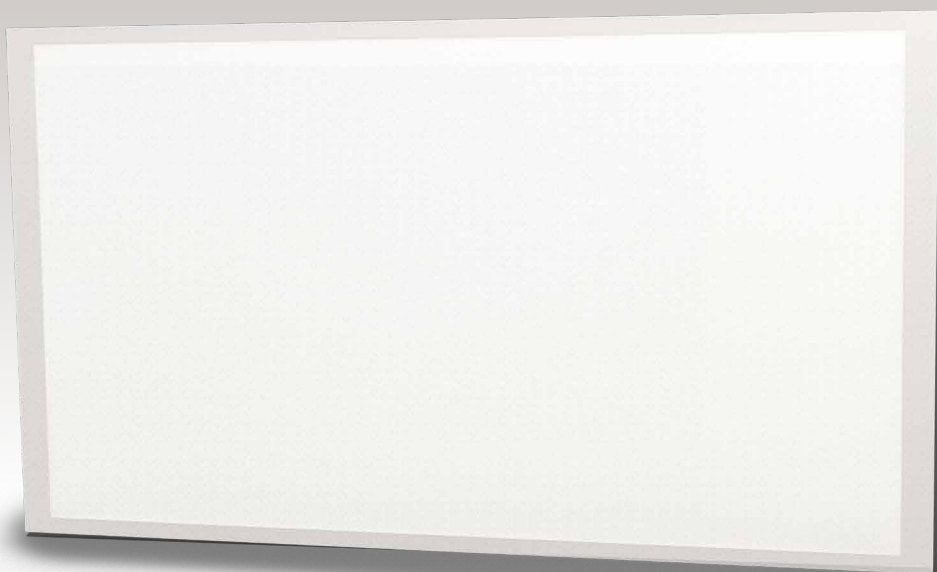

Dimmable Version  
Available



Emergency Version  
Available



### FEATURES:

- Replacement for 1200 x 600mm Modular Fittings
- Excellent colour rendering
- Long lifetime of 30,000 hours
- Slim, modern design
- Save up to 60% on energy costs

### APPLICATIONS



COMMERCIAL



FACTORIES



INDUSTRIAL



WAREHOUSE

**72W**

# LED PANEL

## 1200 X 600mm

Fits in suspended ceiling grid. Direct replacement for fluorescent luminaires. Installs in minutes!

Part No.	223726	223733	223740
<b>DESCRIPTION</b>	LED Panel 72W White Frame 3000K	LED Panel 72W White Frame 4000K	LED Panel 72W White Frame 6000K
<b>DIMENSIONS</b>	1195 x 595 x 33mm		
<b>POWER FACTOR</b>	0.90		
<b>POWER INPUT</b>	72W		
<b>CURRENT</b>	900mA		
<b>COLOUR TEMPERATURE</b>	3000K (Warm White)	4000K (Cool White)	6000K (Daylight White)
<b>COLOUR RENDITION (CRI)</b>	Ra>81		
<b>LUMENS</b>	6200lm	6300lm	6400lm
<b>LIGHT EFFICACY</b>	90lm/W		
<b>IP RATING</b>	IP20		
<b>BEAM ANGLE</b>	120°		
<b>CONSTRUCTION</b>	Aluminium, PS		
<b>WORKING TEMPERATURES</b>	-20°C to +40°C		
<b>ENERGY CONSUMPTION</b>	72kWh/1000hrs		
<b>DRIVER</b>	Bright Source		
<b>CERTIFICATION</b>	CE, RoHS		
<b>WARRANTY</b>	1year (+2 years extended warranty with online registration)		

# BRIGHT SOURCE



Formerly rated A+  
(same quality,  
new energy rating  
label regulations)

