


LED PANEL

1200 X 600mm

72W

Fits in suspended ceiling grid. Direct replacement for fluorescent luminaires. Installs in minutes! Low Glare Panel UGR <19

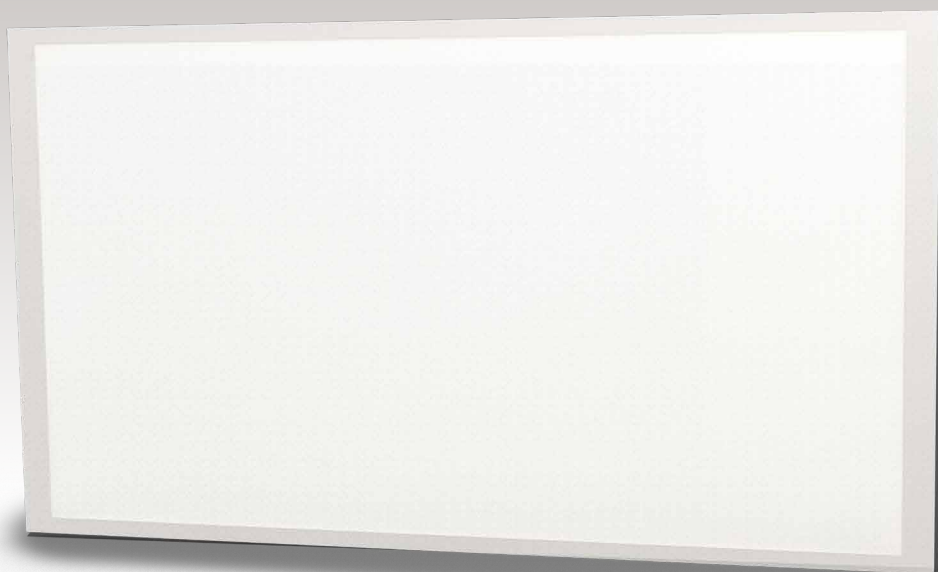

Emergency Version
Available



FEATURES:

- Replacement for 600 x 600mm Modular Fittings
- Low Glare UGR <19 in compliance with EN12464-1
- Excellent colour rendering
- Long lifetime of 30,000 hours
- Slim, modern design
- Save up to 60% on energy costs

APPLICATIONS



COMMERCIAL



Factories



INDUSTRIAL



WAREHOUSE

72W


LED PANEL

1200 X 600mm

Fits in suspended ceiling grid. Direct replacement for fluorescent luminaires. Installs in minutes! Low Glare Panel UGR <19

Part No.	223139	223146
DESCRIPTION	LED Panel 72W White Frame 4000K	LED Panel 72W White Frame 4000K
DIMENSIONS	1195 x 595 x 9mm	
POWER FACTOR	0.90	
POWER INPUT	72W	
CURRENT	900mA	
COLOUR TEMPERATURE	4000K (Cool White)	6000K (Daylight White)
COLOUR RENDITION (CRI)	Ra>81	
LUMENS	6500lm - 6700lm	
COLOUR RENDITION (CRI)	Ra>80	
IP RATING	IP40	
BEAM ANGLE	120°	
CONSTRUCTION	Aluminium, PS	
WORKING TEMPERATURES	-35°C to +50°C	
ENERGY CONSUMPTION	72kWh/1000hrs	
DRIVER	Bright Source	
CERTIFICATION	CE, RoHS	
WARRANTY	1year (+2 years extended warranty with online registration)	

BRIGHT SOURCE

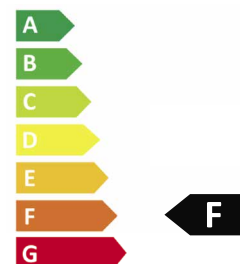

Formerly rated A+
(same quality,
new energy rating
label regulations)

