LED LOW BAY

5000K



FEATURES:

- Comes with 2 hanging brackets plus 2 x 1m chain with carabiner
- Perfect for warehouses, storage aisles, work areas
- Directional LED lighting to produce a more consistent light
- High lumen output 135 lm/W
- 1-10V dimmable version available
- Emergency option available with self-test
- Microwave with Daylight Saving sensor and Corridor Function available on request

APPLICATIONS




LED LOW BAY 5000K

Consistent Directional Lighting

Part No. Part No. Emergency Version DESCRIPTION	203001 203001-E* 90W LED Low Bay	203018 203018-E* 110W LED Low Bay	203032 203032E* 165W LED Low Bay
DIMENSIONS		600mm x 305mm x 48mm	
POWER INPUT		100-240VAC 50/60Hz	
COLOUR TEMPERATURE		5000K (Daylight)	
LUMENS	12,150lm	14,850lm	22,275lm
COLOUR RENDITION (CRI)		Ra>80	
BEAM ANGLE		100°	
POWER CONSUMPTION	100-240VAC 50/60Hz		
WORKING TEMPERATURES		-40°C to +50°C	
STORAGE TEMPERATURES		-40°C to +40°C	
LIFETIME		50,000 Hours	
CONSTRUCTION	Steel/Polycarbonate Panel		
IP RATING		IP20	
DRIVER		Bright Source	
WARRANTY	1 year (+ 2 years extended warranty with online registration)		

^{*} Battery warranty for Emergency items valid for 2 years only

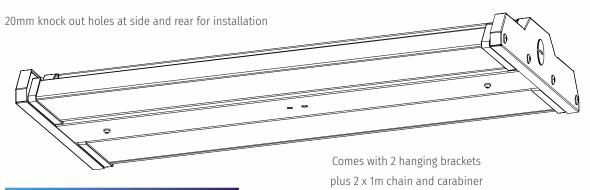

M		(Lx)
2	100°	1353
3	100° 90W	601
4		338
5		216

M		(Lx)
2	100°	2481
3	100° 165W	1103
4		620
5		397



M		(Lx)
2	100°	1654
3	100° 110W	735
4		413
5		264

BRIGHT SOURCE

