


TP(A) FIRE RATED LOW GLARE LED PANEL 600 X 600mm

36W

Fits in suspended ceiling grid. Direct replacement for fluorescent luminaires. Installs in minutes!

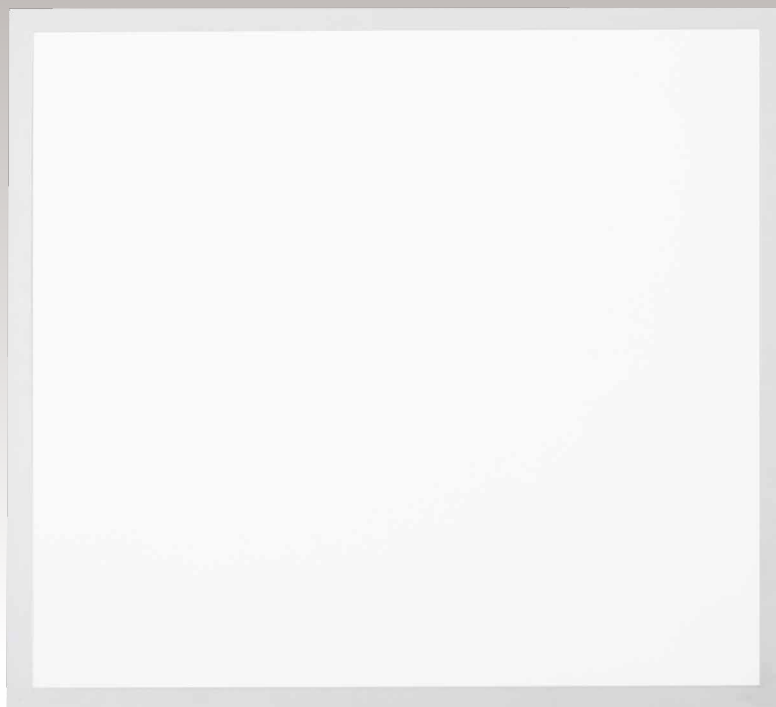

Dimmable Version
Available



FEATURES:

- Bright Source Premium LED backlit panel
- TP(a) rated
- UGR<19 Low Glare
- 3 colours available
- 5 year warranty
- 36W - 10% lower power consumption than standard panels
- Emergency, dimmable and sensor options available

APPLICATIONS



EDUCATION



COMMERCIAL
KITCHENS



OFFICES



RETAIL

36W

TP(A) FIRE RATED LOW GLARE LED PANEL 600 X 600mm

Fits in suspended ceiling grid. Direct replacement for
fluorescent luminaires. Installs in minutes!

Part No.	223757	223764	223771
DESCRIPTION	LED Panel 36W White Frame 3000K	LED Panel 36W White Frame 4000K	LED Panel 36W White Frame 6000K
DIMENSIONS	595 x 595 x 24mm		
POWER CONSUMPTION	36kWh/1000hrs		
POWER FACTOR	0.90		
COLOUR TEMPERATURE	3000K (Warm White)	4000K (Cool White)	6000K (Daylight White)
COLOUR RENDITION (CRI)	Ra>80		
LUMENS	3600lm		
IP RATING	IP20		
BEAM ANGLE	90°		
SWITCHING CYCLES	50,000		
LIFETIME	50,000h		
CONSTRUCTION	Polycarbonate, Aluminium and Steel		
WORKING TEMPERATURES	-20°C to +40°C		
ENERGY CONSUMPTION	F		
DRIVER	AGT		
LOW GLARE	UGR<19		
CERTIFICATION	UKCA,CE, RoHS		
WARRANTY	1 year (+ 4 years extended warranty with online registration)		
SDCM	6		
L Value	80		
B Value	10		
Driver	AGT		
LED Chip Brand	SANAN		
IK Rating	IK02		



BRIGHT SOURCE


F

Formerly rated A+
(same quality,
new energy rating
label regulations)

